

INPHENIX

Reflective Semiconductor Optical Amplifier


IPRAD1501 (1550nm)

Features

- 1550nm & Custom Wavelengths Available
- Wide Operating Bandwidth
- High Gain and High Output Power
- Polarization Independent
- Custom design available

Applications

- Gain Medium for single FBG Laser
- Gain Medium for Tunable External Cavity Laser
- WDM-PON

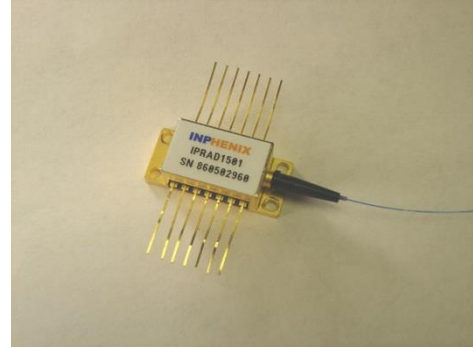

IPRAD1501 Reflective Semiconductor Optical Amplifier

Parameter	Symbol	Specifications			Unit
		Min.	Typ.	Max.	
Drive Current	I_F	-	100	150	mA
Operating Wavelength	λ_p	1500	1550	1570	nm
3dB Optical Bandwidth	$\Delta\lambda_{3dB}$	-	40	-	nm
Small Signal @ - 25dBm Signal	G_{max}	15	18	-	dB
Gain Ripple with Respect to λ	ΔG	-	3	4	dB
Saturation Output Power	P_{sat}	3	6	-	dBm
Noise Figure	NF	-	7	9	dB
Polarization Dependent Gain	PDG	-	1	2	dB


Absolute Maximum Ratings

Parameter	Min.	Max.	Unit
Operating Temperature	- 20	70	°C
Storage Temperature	- 40	85	°C
TEC Drive Current	-	1.5	A
TEC Drive Voltage	-	3.6	V
Max. Current	200		mA
Thermistor Resistance	10k Ω @ 25°C		
SOA Chip Temperature Setting	25°C		
Fiber Type	SMF/PMF/MMF		
Fiber Jacket	250 μ m tight buffer with/without 900 μ m loose tube, or 900 μ m tight buffer		


All information contained herein is believed to be accurate and is subject to change without notification. No responsibility is assumed. Please contact InPhenix for more information. InPhenix and the InPhenix logo are trademarks of InPhenix Inc. All rights are reserved.

INPHENIX

Package Dimensions

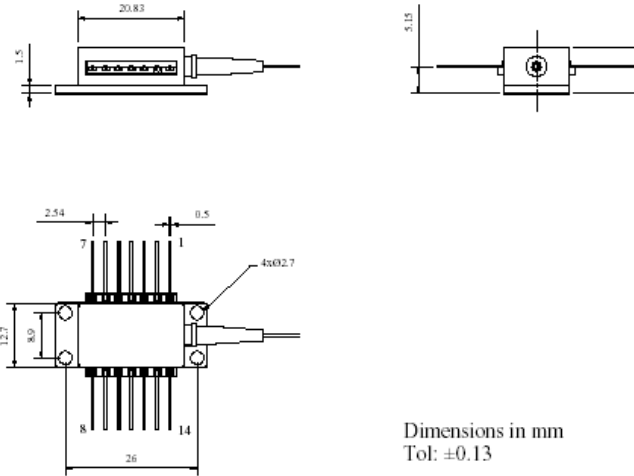

14-Pin BUT Package

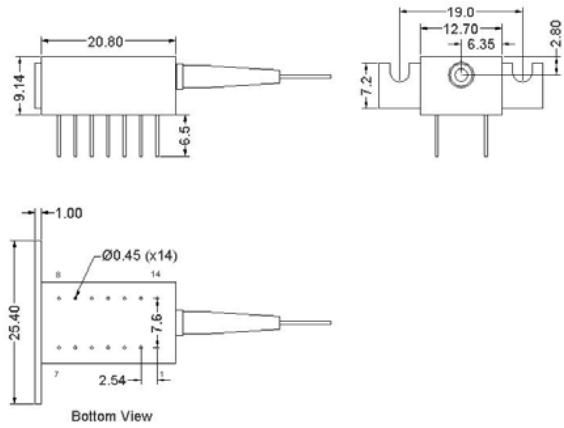


14-Pin DIL Package

Pin Definition

14-pin BUT package				14-pin DIL package			
Pin	Function	Pin	Function	Pin	Function	Pin	Function
1	TEC(+)	8	NC	1	TEC(+)	8	NC
2	Thermistor	9	NC	2	NC	9	RSOA (-)
3	NC	10	RSOA (+)	3	NC	10	Case
4	NC	11	RSOA (-)	4	NC	11	Thermistor
5	Thermistor	12	NC	5	RSOA (+)	12	Thermistor
6	NC	13	Case	6	NC	13	NC
7	NC	14	TEC(-)	7	NC	14	TEC(-)

INPHENIX

Part Numbering System

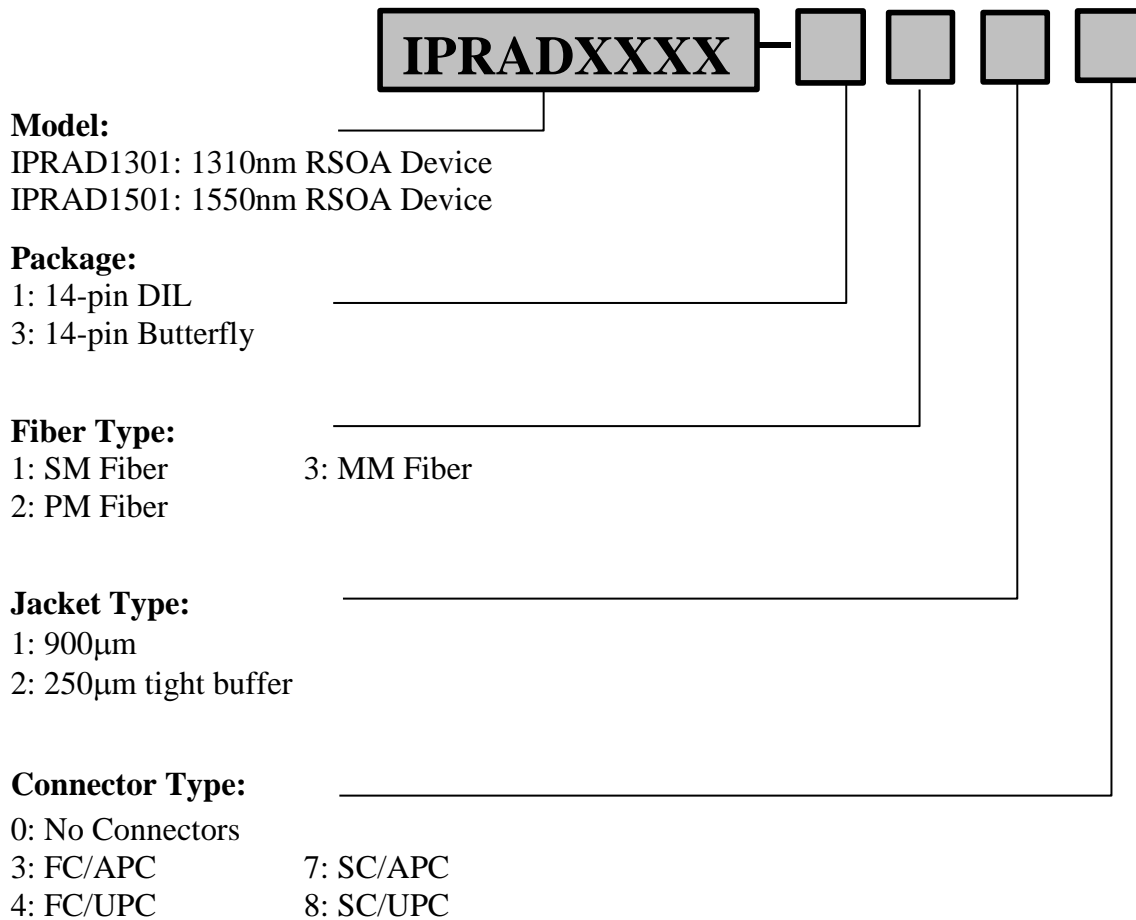

Example: IPRAD1301-1224: 1310nm RSOA in 14-pin DIL with 250 μ m tight buffered PM fiber with FC/UPC connectors

Corporate Office
250 North Mines Rd
Livermore, CA 94551
Tel: 925.606.8809
Fax: 925.606.8810
www.inphenix.com
sales@inphenix.com