

INPHENIX

Swept Light Source Desktop

Part Number: IPSWM10xx-0316

Date: October 11, 2013

1. Configuration

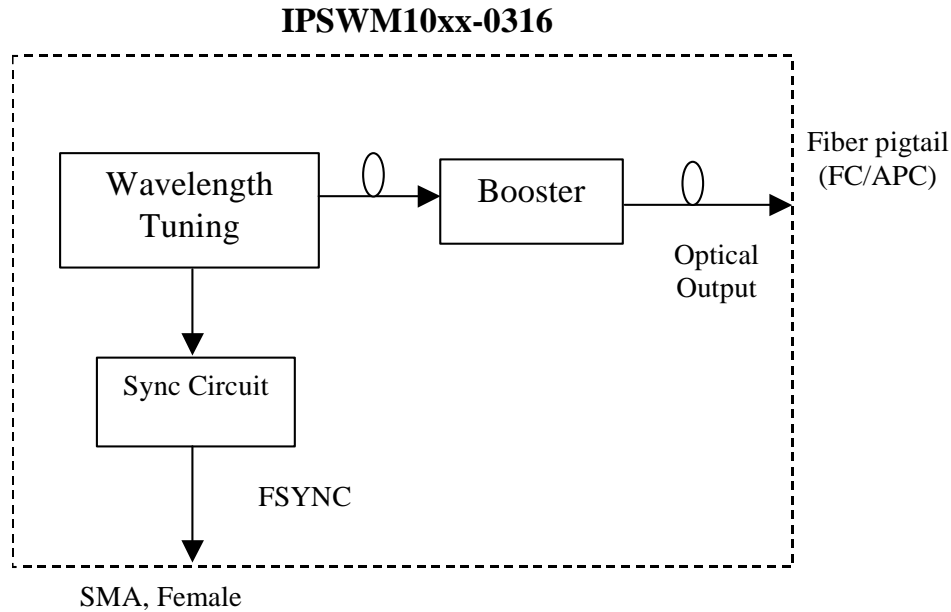


Figure 1 Configuration of Swept Light Source Desktop

2. General Conditions

Parameter	Min.	Typ.	Max.	Unit
Power Supply Voltage	100	-	240	VAC
Power Consumption	-	-	30	W
Operating Temperature	10	25	35	°C
Operating Humidity	30	60	75	%
Storage Temperature	-40	-	+70	°C
Humidity	10	-	100	%

INPHENIX

3. Optical and Electrical Characteristics

Items	Specifications			Unit	Notes
	Min.	Typ.	Max.		
Optical Characteristics					
Scan Wavelength Range(-10dB cut off)	1030	-	1130	nm	@25°C. Connectors are included
Average Optical Output Power	10 ~ 30			mW	
Scan rate	8 ~ 50			KHz	One sweep period includes forward and backward wavelength scans as shown Figure 3
Wavelength Repetition Rate	16 ~ 100			KHz	
Coherence Length*	4 ~ 16			mm	
Optical Output type	FC Adaptor			-	
Connector Type	FC/APC			-	
Fiber Type	HI1060 SM fiber or equivalent			-	
Electrical Characteristics					
Scan Trigger (FSYNC)	8 ~ 50			KHz	
VH for TTL input/output	3.80	-	-	V	
VL for TTL input/output	-	-	1.02	V	
Trigger Connector Type	SMA connector, Female			-	

* Coherence length is defined as the path length mismatch at a single sided displacement (from match to mismatch point only) in Mach-Zehnder interferometer that results in the fringe visibility being reduced by 6dB.

INPHENIX

4. Typical Spectra

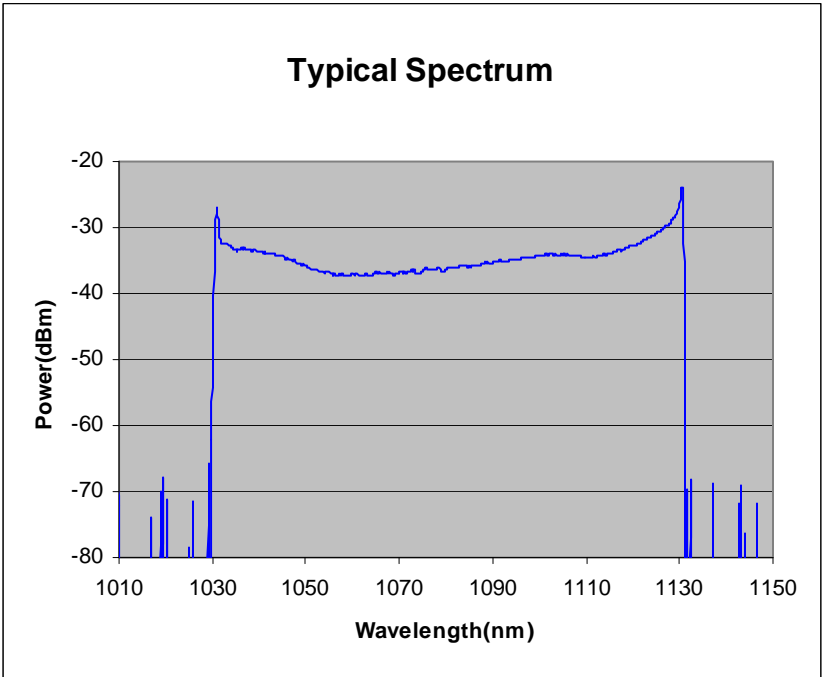


Figure 2 Typical optical spectrum of 1050nm SWLS desktop

Scan Period


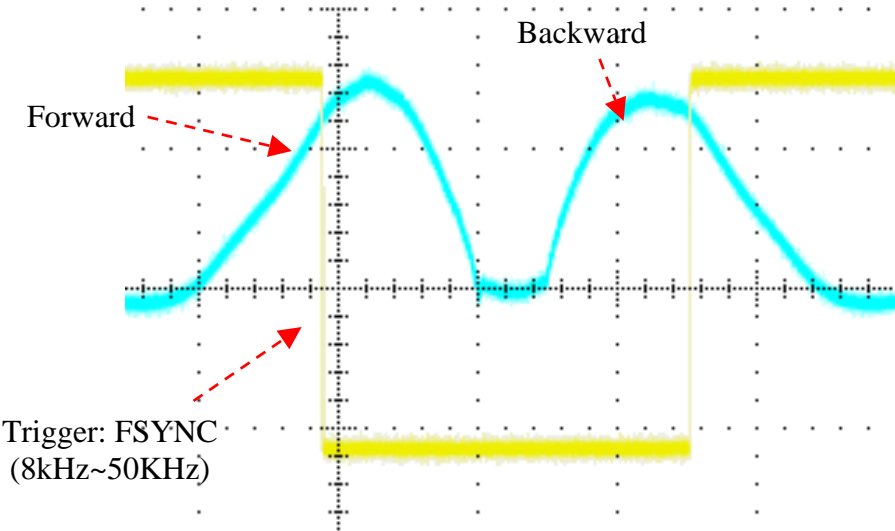


Figure 3 Forward and backward spectra detected by photo diode in one swept period. Rise-Fall edges of frame trigger signal (FSYNC) have fixed phase delay with respect to forward and backward waves.


INPHENIX

5. Mechanical Specifications

Mechanical Drawing of 340mm (W) x 260mm (D) x 90mm (H) Case Type

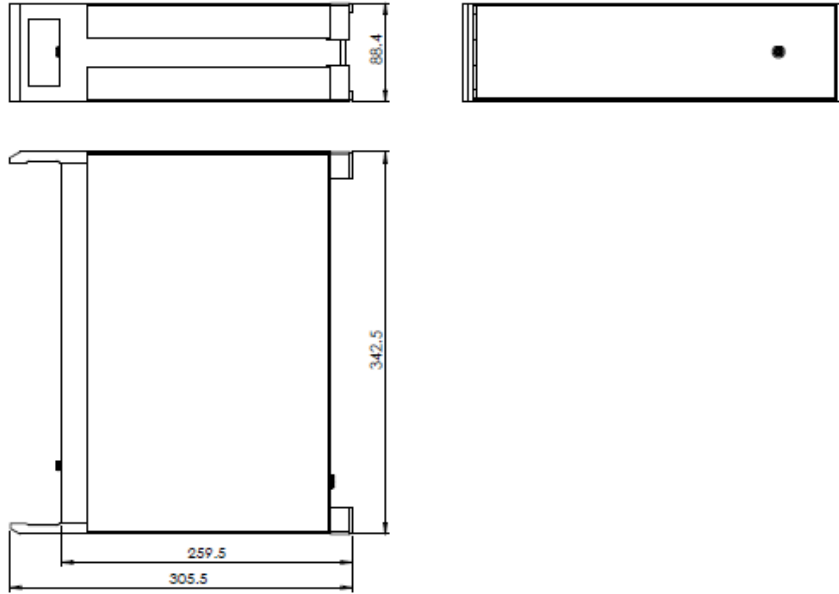


Mechanical Drawing of 235mm (W) x 250mm (D) x 120mm (H) Case Type

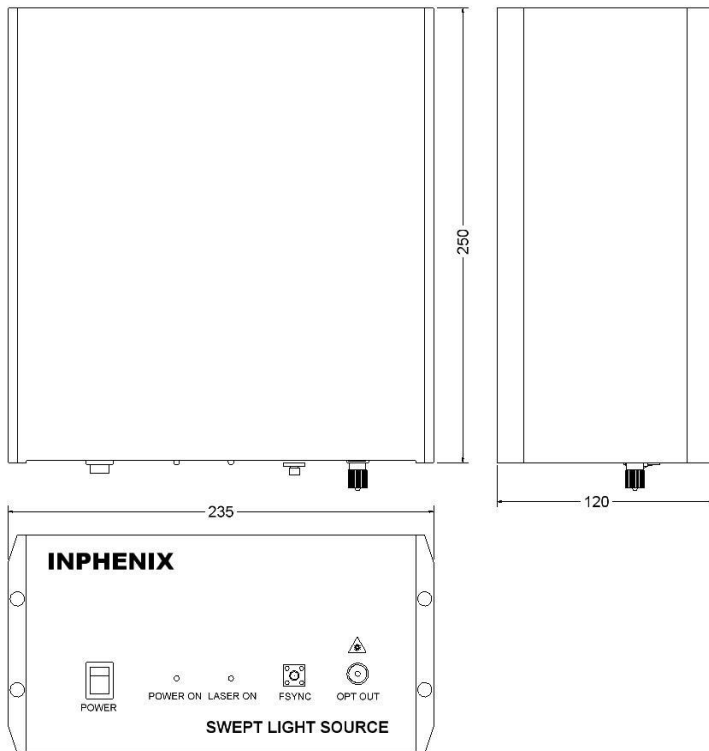


INPHENIX

Mechanical Drawing of 205mm(W)×60mm(H)×175mm(D) Case Type

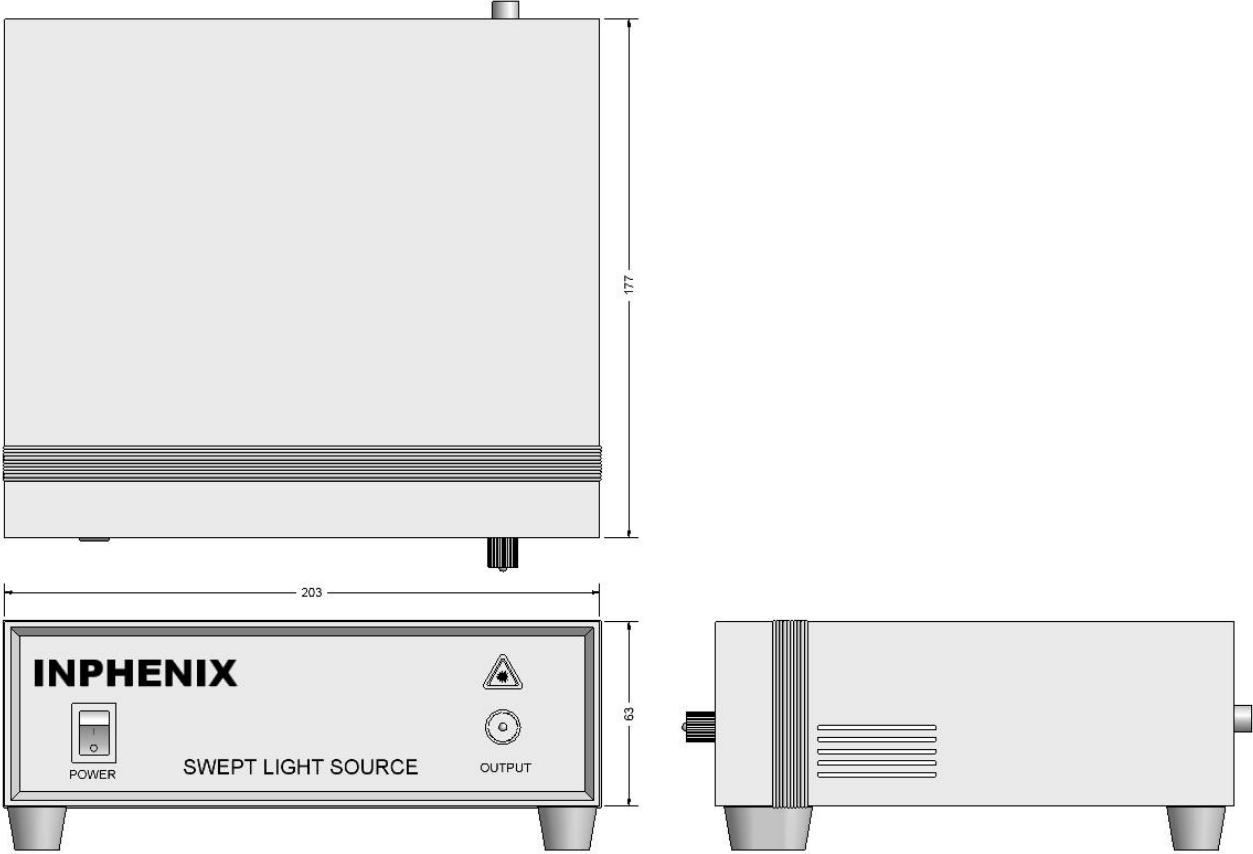

INPHENIX

6. Part Numbering Structure of Swept Light Source desktop



Model Number —————

08** : 800~890nm window
 10** : 1010~1090nm window
 13** : 1300~1390nm window
 15** : 1500~1590nm window

Output Type —————

0-FC Adaptor
 1-Pigtail fiber

Connector Type —————

0-No Connectors
 3-FC/APC 4-FC/UPC
 7-SC/APC 8-SC/UPC

Fiber Type —————

1-900 μm SM Fiber
 2-900 μm PM Fiber

Case Size —————

6- 235×250×120mm case
 7- 205×175×60mm case
 8- 340×260×90mm case
 9- 450×300×90mm case

Example: IPSWM10xx-0316: 1050nm-type Swept Light Source desktop in 235×250×120mm case with FC adaptor output, 900um SM fiber with FC/APC connector.