

Fabry-Perot Laser


IPFPD1502(1550nm)

Features

- Low Threshold and Operating Current
- High Modulation Speed, up to 2.5 Gb/s
- Wide Operational Temperature Range
- 14-pin /, 14-pin DIL Available

Applications

- Optical Transmission
- Data Communication
- Biometer
- Local Optical Network
- FTTH (Fiber to the Home)

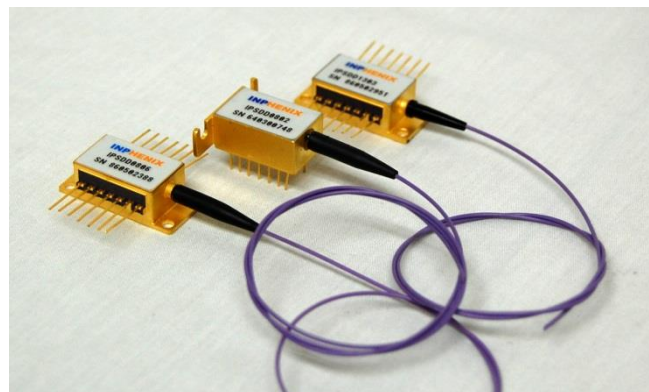


Device Specifications

Parameter	Symbol	Min.	Typ.	Max.	Unit
Peak Wavelength	λ_c	1542	1550	1565	nm
Spectrum Width (rms)	$\Delta\lambda$		5		nm
Output Power	P_o	1	-	2	mW
Forward Current	I_f	-	-	50	mA
Threshold Current	I_{th}	-	-	25	mA
PD Monitor Current	I_{pd}	50			μ A
Slope Efficiency	Se	0.05			W/A

Absolute Maximum Ratings

Parameter	Min.	Max.	Unit
Operating Temperature	- 20	70	°C
Storage Temperature	- 40	85	°C
TEC Drive Current	-	1.5	A
TEC Drive Voltage	-	3.6	V
Maximum Current	200		mA
Thermistor Resistance	10k Ω @ 25°C		
SLD Chip Temperature Setting	25°C		
Fiber Type	SMF/PMF/MMF		
Fiber Jacket	250 μ m tight buffer with 900 μ m loose tube		
Package	14-pin DIL/14-pin BUT		
Lead Solder Temperature	260°C for 10 Seconds		

Package Dimensions

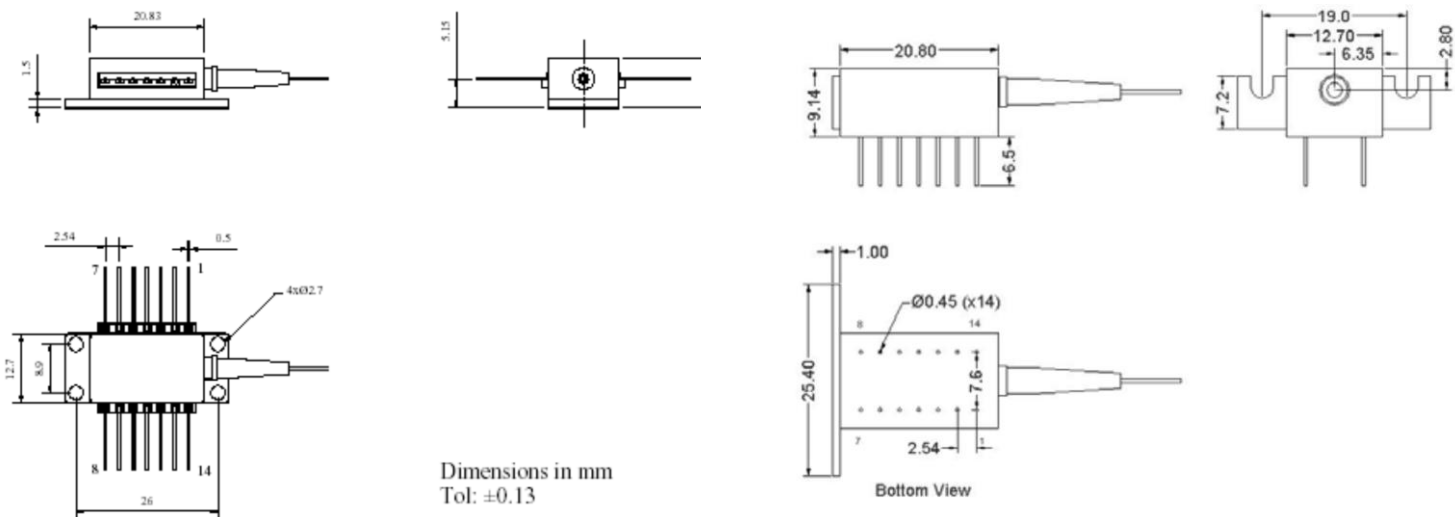

14-Pin BUT Package


14-Pin DIL Package

Pin Definition

14-pin BUT package				14-pin DIL package			
Pin	Function	Pin	Function	Pin	Function	Pin	Function
1	TEC (+)	8	NC	1	TEC (+)	8	NC
2	Thermistor	9	NC	2	NC	9	LD (-)
3	NC	10	LD (+)	3	NC	10	Case
4	NC	11	LD (-)	4	NC	11	Thermistor
5	Thermistor	12	NC	5	LD (+)	12	Thermistor
6	NC	13	Case	6	NC	13	NC
7	NC	14	TEC (-)	7	NC	14	TEC (-)

- If the LD is ordered with a Back Facet Monitor, Pin 7 is PD-Cathode and Pin 8 is PD+Anode

Part Numbering System

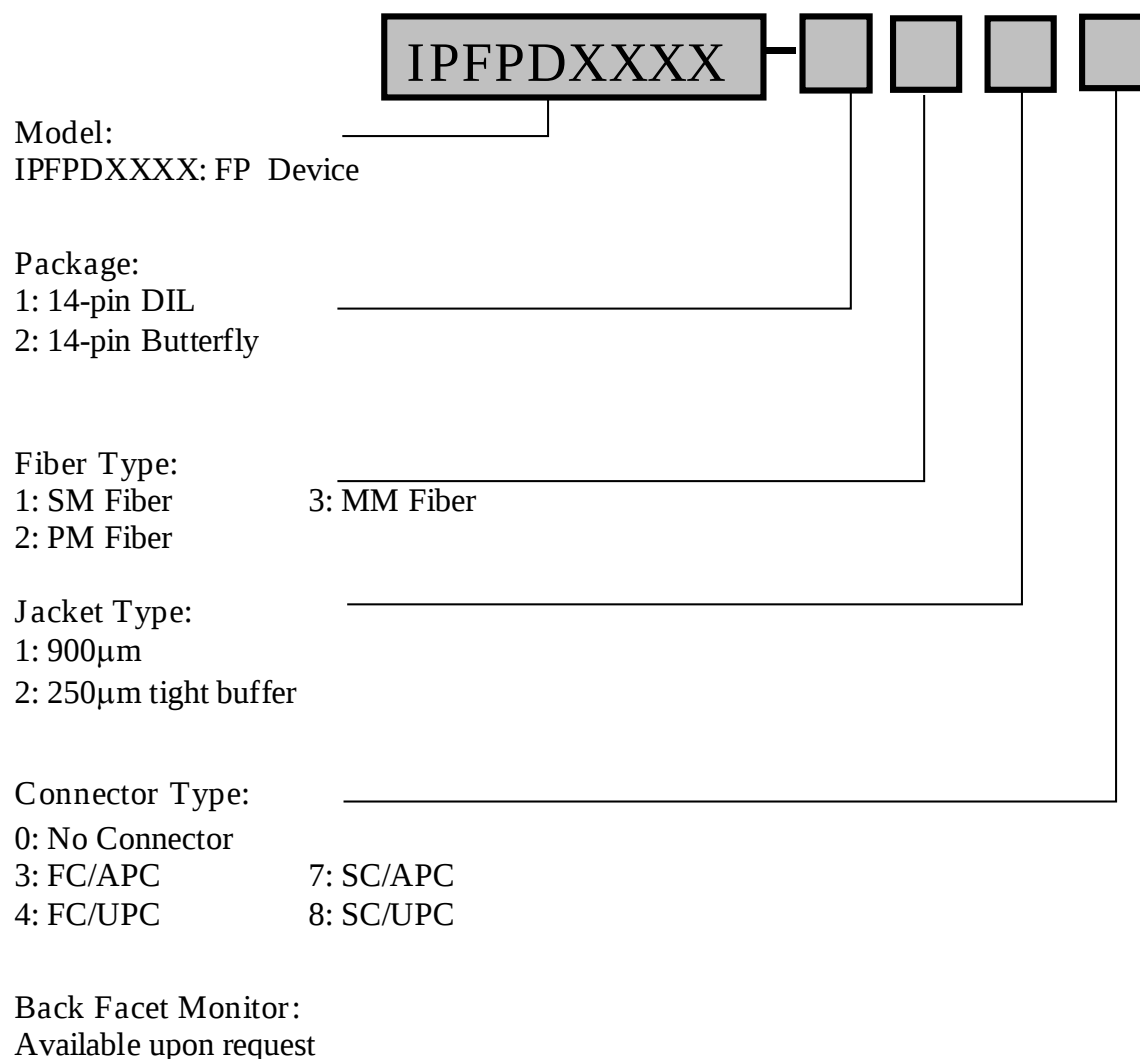

Example: IPFPD1502-1224: 1550nm FP in 14-pin DIL with 250µm tight buffered PM Fiber with FC/UPC connectors

Corporate Office

250 North Mines Rd
 Livermore, CA 94551
 Tel: 925.606.8809
 Fax: 925.606.8810
www.inphenix.com
sales@inphenix.com