
Semiconductor Optical Amplifier Device (Pre-Amplifier Type)

IPSAD1402 (1490nm)

Features

- Wide Optical Bandwidth
- Low Noise Figure
- Low Gain Ripple
- Low Polarization Sensitivity
- MQW



Applications

- Receiver Pre-Amplifier
- Telecom
- 40G and 100G Reach Extension


Device Specifications

Parameter	Symbol	Specifications			Unit
		Min.	Тур.	Max.	Omt
Drive Current	I _F	-	300	-	mA
Operating Wavelength	λο	1480	1490	1510	nm
3dB Optical Bandwidth	$\Delta\lambda_{3dB}$	-	55	-	nm
Small Signal Gain at @ - 25dBm Signal	G _{max}	-	16	-	dB
Gain Ripple with Respect to λ	ΔG	-	-	1	dB
Saturation Output Power	P _{sat}	-	11	-	dBm
Noise Figure	NF	-	-	8	dB
Polarization Dependent Gain	PDG	-	1.5	-	dB

Absolute Maximum Ratings

Parameter	Min.	Max.	Unit
Operating Temperature	- 20	70	°C
Storage Temperature	- 40	85	°C
SOA Forward Current	-	500	mA
SOA Reverse Voltage	-	2.5	V
TEC Drive Current	-	1.5	А
TEC Drive Voltage	-	3.6	V
Thermistor Resistance	10kΩ @ 25°C		
SOA Chip Temperature Setting	25°C		
Fiber Type	SMF/PMF/MMF ClearCurve Fiber		
Fiber Jacket	250µm tight buffer with/without 900µm loose		
	tube, or 900µm tight buffer		
Package	14-pin Butterfly Type B or C		

Package Dimensions

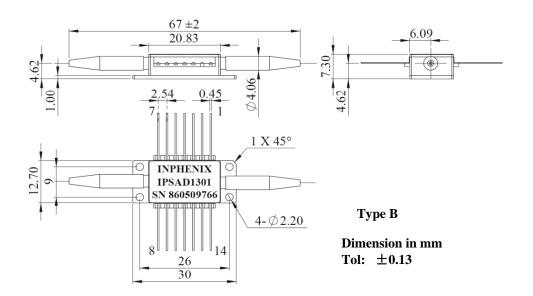


Pin Definition

Pin	14-pin Butterfly	
1	TEC(+)	
2	NC	
3	Thermistor *	
4	Thermistor *	
5	NC	
6	NC	
7	NC	
8	NC	
9	NC	
10	SOA(+)	
11	SOA(-)	
12	NC	
13	Case	
14	TEC(-)	

Option: Pin 2 & Pin 5 for thermistor

All information contained herein is believed to be accurate and is subject to change without notification. No responsibility is assumed. Please contact InPhenix for more information. InPhenix and the InPhenix logo are trademarks of InPhenix Inc. All rights are reserved.

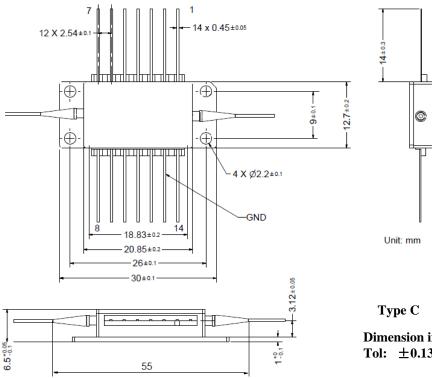

Dimension in mm Tol: ±0.13

Pin Definition

Pin	14-pin Butterfly	
1	TEC(+)	
2	NC	
3	Thermistor *	
4	Thermistor *	
5	NC	
6	NC	
7	NC	
8	NC	
9	NC	
10	SOA(+)	
11	SOA(-)	
12	NC	
13	Case	
14	TEC(-)	

Option: Pin 2 & Pin 5 for thermistor

All information contained herein is believed to be accurate and is subject to change without notification. No responsibility is assumed. Please contact InPhenix for more information. InPhenix and the InPhenix logo are trademarks of InPhenix Inc. All rights are reserved.

Part Numbering System

	IPSADXXXX -	
Model: IPSADXXXX: SOA	Device	
Package: 5: 14-pin Butterfly, T 6: 14-pin Butterfly, T		
Fiber Type: 1: SM fiber 2: PM fiber	3: MM fiber 8: SM ClearCurve fiber*	
Jacket Type: 1: 900μm 2: 250μm		
Connector Type: 0: No Connectors 3: FC/APC 4: FC/UPC 7: SC/APC 8: SC/UPC		
Example: IPSAD1301-5110: 1310nm SOA in 14-pin Butterfly Package with 900µm SM Fiber with no Connectors.		

* SM ClearCurve fiber is not available on IPSAD0801, IPSAD0901 and IPSAD0902 products.

Corporate Office

250 North Mines Rd Livermore, CA 94551 Tel: 925.606.8809 Fax: 925.606.8810 www.inphenix.com sales@inphenix.com

All information contained herein is believed to be accurate and is subject to change without notification. No responsibility is assumed. Please contact InPhenix for more information. InPhenix and the InPhenix logo are trademarks of InPhenix Inc. All rights are reserved.