
INPHENIX

Semiconductor Optical Amplifier Device (Booster Type)

IPSAD1601 (1600nm)

Features

- · Wide Optical Bandwidth
- · High Output Power
- · Low Polarization Sensitivity
- · MQW or Bulk Structure

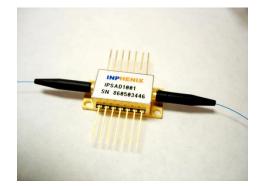

Applications

• Telecom

Device Specifications

Parameter	Symbol	Sp	Unit			
rarameter	Symbol	Min.	Тур.	Max.	Unit	
Drive Current	I _F	-	400	-	mA	
Operating Wavelength	λ_{o}	1565	-	1625	nm	
3dB Optical Bandwidth	$\Delta\lambda_{3dB}$	-	50	-	nm	
Small Signal Gain at @ - 25dBm Signal	G _{max}	-	20	-	dB	
Gain Ripple with Respect to λ	ΔG	-	2	-	dB	
Saturation Output Power	P _{sat}	-	9	-	dBm	
Noise Figure	NF	-	8	10	dB	
Polarization Dependent Gain	PDG	-	1	-	dB	




Absolute Maximum Ratings

Parameter	Min. Max.		Unit			
Operating Temperature	-20	70	°C			
Storage Temperature	- 40 85		°C			
SOA Forward Current	- 600		mA			
SOA Reverse Voltage	-	- 2.5				
TEC Drive Current	-	1.5	А			
TEC Drive Voltage	-	3.6	V			
Thermistor Resistance	10kΩ @ 25°C					
SOA Chip Temperature Setting	25°C					
Fiber Type	SMF/PMF/MMF ClearCurve Fiber					
Fiber Jacket	250µm tight buffer with/without 900µm loose					
	tube, or 900µm tight buffer					
Package	14-pin Butterfly Type B or C					



Package Dimensions

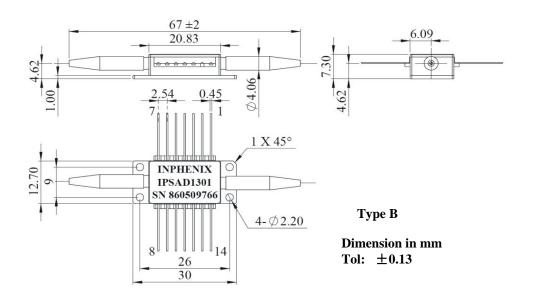


Pin Definition

Pin	14-pin Butterfly
1	TEC(+)
2	NC
3	Thermistor *
4	Thermistor *
5	NC
6	NC
7	NC
8	NC
9	NC
10	SOA(+)
11	SOA(-)
12	NC
13	Case
14	TEC(-)

Option: Pin 2 & Pin 5 for thermistor

All information contained herein is believed to be accurate and is subject to change without notification. No responsibility is assumed. Please contact InPhenix for more information. InPhenix and the InPhenix logo are trademarks of InPhenix Inc. All rights are reserved.

INPHENIX

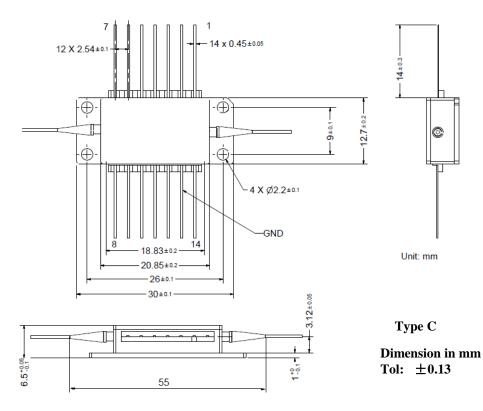

Pin Definition

Pin	14-pin Butterfly
1	TEC(+)
2	NC
3	Thermistor *
4	Thermistor *
5	NC
6	NC
7	NC
8	NC
9	NC
10	SOA(+)
11	SOA(-)
12	NC
13	Case
14	TEC(-)

Option: Pin 2 & Pin 5 for thermistor

All information contained herein is believed to be accurate and is subject to change without notification. No responsibility is assumed. Please contact InPhenix for more information. InPhenix and the InPhenix logo are trademarks of InPhenix Inc. All rights are reserved.

INPHENIX

Part Numbering System

	IPS	AD	XX	XX]-[
Model: IPSADXXXX: SOA	Device							
Package: 5: 14-pin Butterfly, T 6: 14-pin Butterfly, T								
Fiber Type: 1: SM fiber 2: PM fiber	3: MM fiber 8: SM ClearC	Curve f	ïber*					
Jacket Type: 1: 900μm 2: 250μm						 		
Connector Type:								
0: No Connectors 3: FC/APC 4: FC/UPC 7: SC/APC 8: SC/UPC								

Example: IPSAD1301-5110: 1310nm SOA in 14-pin Butterfly Package with 900 μ m SM Fiber with no Connectors.

* SM ClearCurve fiber is not available on IPSAD0801, IPSAD0901 and IPSAD0902 products.

Corporate Office

250 North Mines Rd Livermore, CA 94551 Tel: 925.606.8809 Fax: 925.606.8810 www.inphenix.com sales@inphenix.com

All information contained herein is believed to be accurate and is subject to change without notification. No responsibility is assumed. Please contact InPhenix for more information. InPhenix and the InPhenix logo are trademarks of InPhenix Inc. All rights are reserved.